


**ifi**  
**ZEN**  
**STREAM**

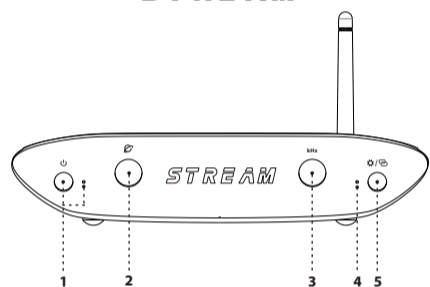

Thank you for purchasing the Stream from ZEN series. The Stream is a Wi-Fi Audio Transport.

**1. Power switch and indicator (⏻)**

**2. Network Status LED (📶)**

The LED color scheme indicates the signal strength and network status received by ZEN Stream from the router.

	LED	Speed
<b>Internet</b>	White	Fast
	Cyan	Slow
<b>Local network (no Internet)</b>	Green	Fast
	Yellow	Slow
<b>No connection</b>	Red	-

**3. Audio Format LED (kHz)**

The LED colour scheme indicates the audio format and sampling frequency received by ZEN Stream from the music source.

LED	Mode
Yellow	PCM 44.1/48kHz
White	PCM 88.2/96/176.4/192/352.8/384kHz
Cyan	DSD 64/128
Red	DSD 256
Cyan	DSD 64/128
Green	MQA
Blue	MQA Studio
Magenta	Original Sample Rate*


**4. LED for Hotspot Status**

LED	Status
Flashing	On and awaiting connection
ON	Hotspot Connected
OFF	Hotspot off

\*60 seconds auto OFF if no activation.

**5. LED/HOTSPOT switch (🔗/📶)**

- LED ON/OFF (short press)
- Hotspot ON/OFF (long press)

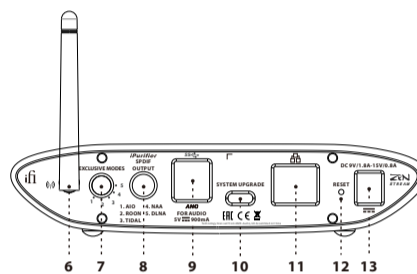

**6. Antenna**

Please attach the enclosed antenna for maximum reception quality.

**7. System (Mode) selector**

The following 5 play modes can be selected:

- 1) All In One. Use for set up
- 2) Roon only
- 3) TIDAL only
- 4) NAA (Network Audio Adapter) only
- 5) DLNA only

**8. SPDIF (Coaxial) output**

This is a coaxial output with iPurifier technology built-in.

**9. USB Type A x 2**

Compatible with USB 2.0 and USB 3.0.

- a) Output - Connect to Dac
- b) Input - Connect to HDD, USB DISK etc

These two USB ports have ANC technology built-in.

**10. System upgrade port**

Used for system firmware upgrade.

**11. Ethernet**

For a Ethernet connection directly from a router.

**12. Factory Reset**

Long press >3s and WAIT for ~5mins  
DO NOT POWER OFF!

\*\*Loss of power during this period may damage your device and leave it unusable.

**13. DC power supply connection**

DC 9V/1.8A-15V/0.8A DC power input. Please connect ZEN Stream to the enclosed power supply.

Tip: For all the various network connection methods, please visit our website.

**Specifications**

<b>Input voltage:</b>	DC 9V/1.8A-15V/0.8A, AC 100-240V, 50/60Hz
<b>Input:</b>	Wi-Fi / Ethernet / USB DISK, HDD etc.
<b>Formats:</b>	PCM384/DSD256/MQA
<b>Output:</b>	USB3.0/Type-A Socket x2 and S-PDIF (Coaxial)
<b>Power consumption:</b>	No Signal ~6W Max Signal ~10W
<b>Dimensions:</b>	158 x 100 x 35 mm (6.2" x 3.9" x 1.4")
<b>Net weight:</b>	578 g (1.27 lbs)
<b>Warranty period:</b>	12 months

Specifications are subject to change without notice.